


vM CT360D STEREO CD TRANSPORT DAC

Controls	
Precautions	
Connections	
Maintenance and advice	
Technical Specifications	

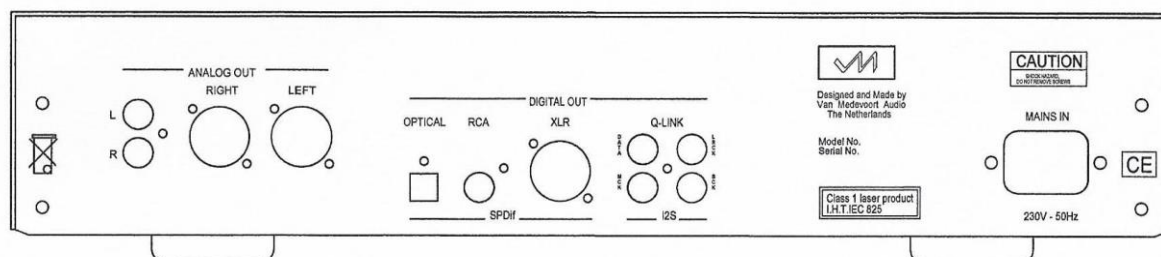

➔ 1 2 3

1. Output Analog RCA line. Left channel top-, Right channel bottom connector.
2. Output Analog XLR balanced Right channel.
3. Output Analog XLR balanced Left channel.

See next to this DAC attachment the CT360 manual for all other connections and features.

Controls	
Precautions	
Connections	
Maintenance and advice	
Technical Specifications	

Signal format	16 bit PCM - 44.1 kHz
Disc format	CD, CD-R, CD-RW
Frequency response CD	2-20,000 Hz
Signal to noise ratio / distortion	> 120 dB / < 0.002 %
Channel separation	> 100 dB
Outputs / connectors analog	2 / RCA + XLR
Analog output RCA / XLR	2.0Vrms / 4.0Vrms
Outputs / connectors digital	4 / Q-Link, XLR, RCA + Optical
Digital output	0.5 Vp-p, EBU-XLR 4Vp-p
Power supply	115-230 Volt / 50-60 Hz
Power consumption	10 / 20 Watt, stby / on
Weight	11 kg
Size w x h (h+feet) x d	434 x 88 (102) x 390 mm

Specifications are subject to change without prior notice.
Copyright © 2017 Van Medevoort Audio / The Netherlands